


BLOCK DIAGRAM



# VIBRATION MOTOR Bar type

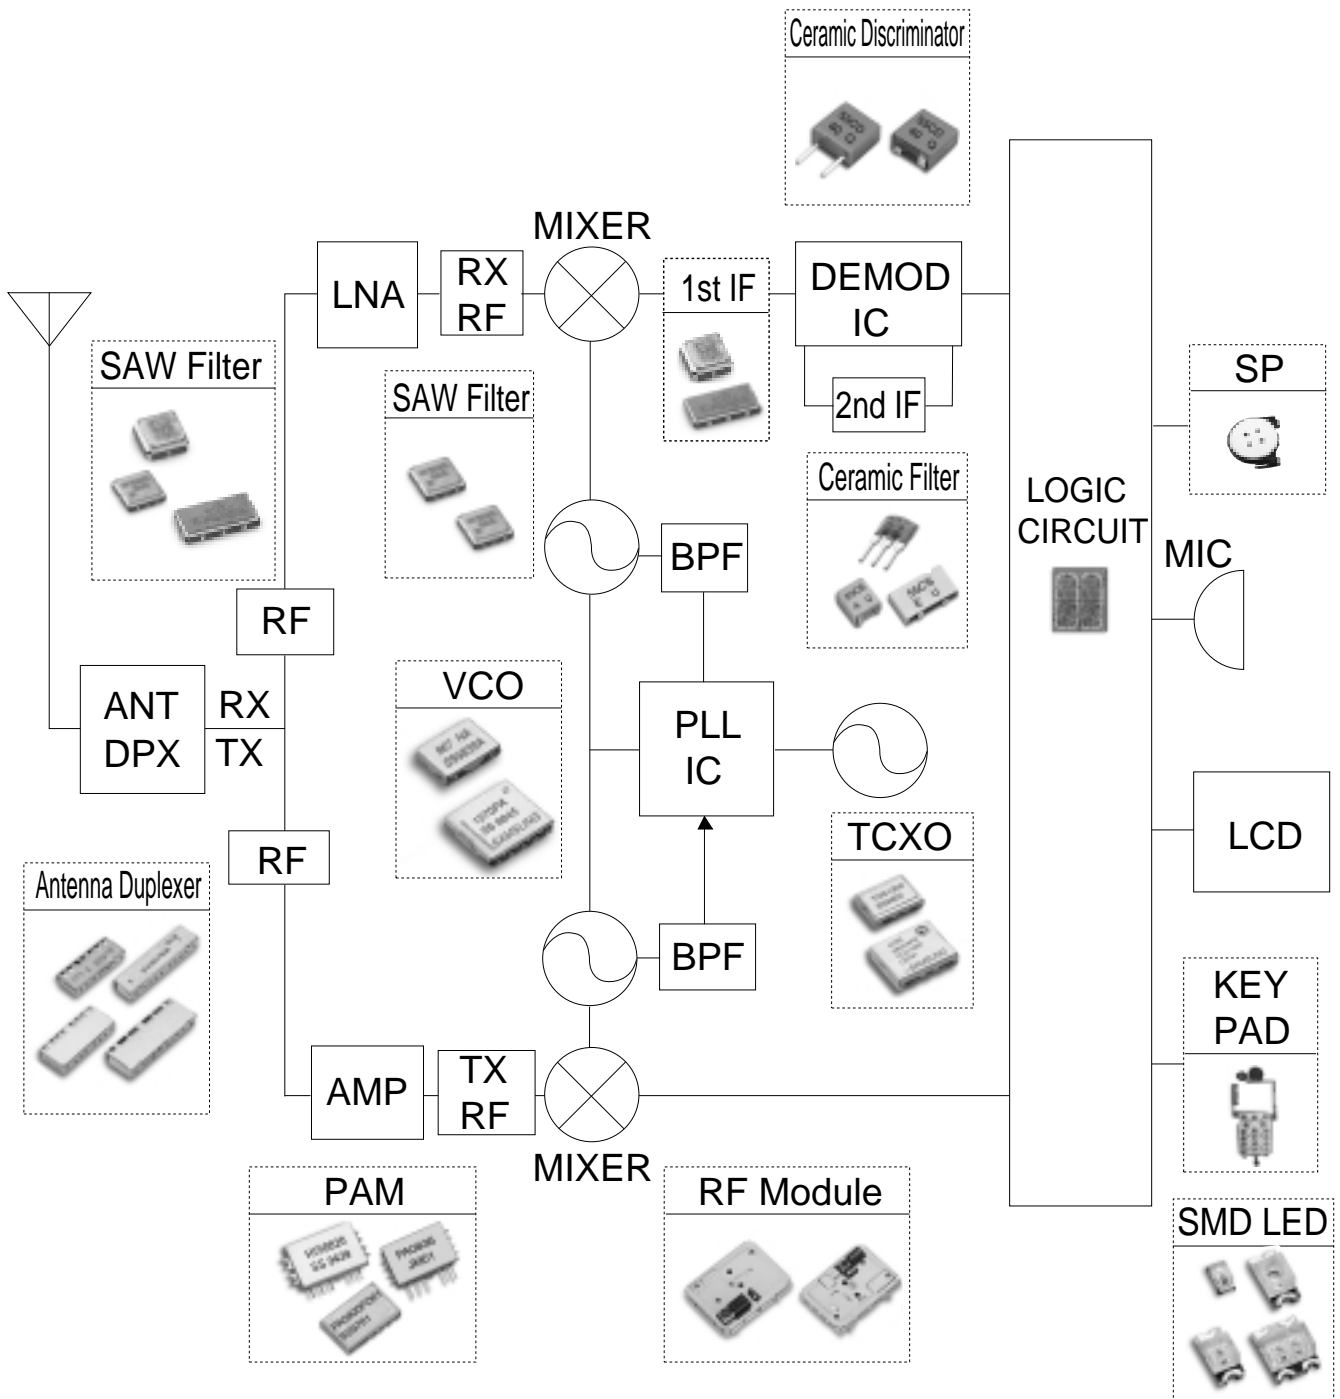







## KEY FEATURES

- Permanent magnet coreless DC Motor
- Smooth rotation due to minimum cogging
- Low noise and low power consumption
- Bracket, lead wire and connector are optional

## MODEL












- $\phi 4 \times 20\text{mm}$  Series
- $\phi 4 \times 17.5\text{mm}$  Series
- $\phi 4 \times 15\text{mm}$  Series
- $\phi 6 \times 15\text{mm}$  Series
- $\phi 6 \times 17\text{mm}$  Series

## DIMENSIONS

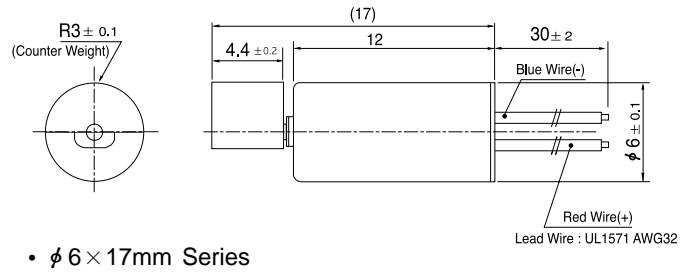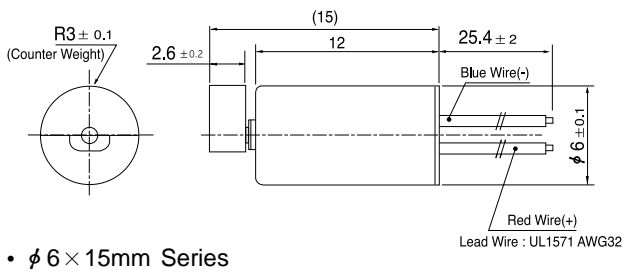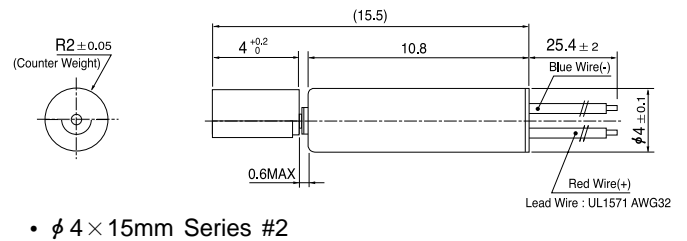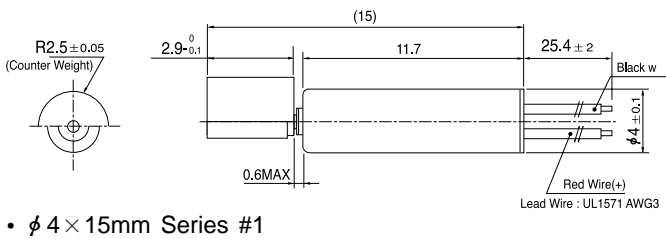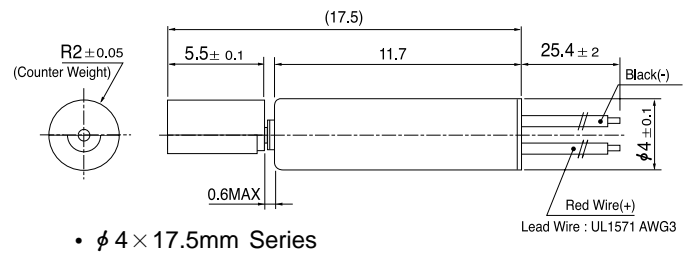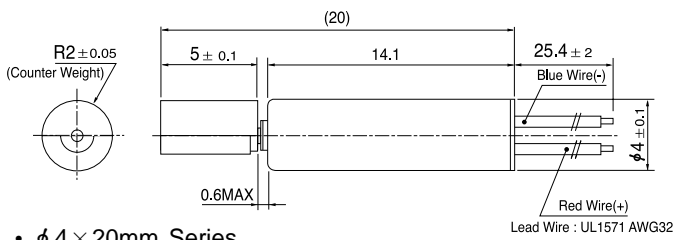

# VIBRATION MOTOR Bar type

Series	Model	Working Voltage(V)	Rated Voltage(V)	Rated Load Speed(rpm)	Rated Load Current(mA)	Starting Voltage(V)	Weight (g)	Vibration (G/100g Jig)
φ 4 × 20mm	DMJBRV04 Series	0.9~1.7	1.3	9000	75	0.9 MAX	1.6	0.7
	DMJBRV14 Series	1.5~2.5	2.0	9500	65	1.5 MAX	1.6	0.75
	DMJBRV24 Series	2.0~3.5	3.0	10000	55	2.0 MAX	1.6	0.8
φ 4 × 17.5mm	DMJBRV64 Series	0.9~1.7	1.3	9000	95	0.9 MAX	1.4	0.7
	DMJBRV74 Series	1.5~2.5	2.0	9500	85	1.5 MAX	1.4	0.75
	DMJBRV84 Series	1.8~3.2	2.5	10000	75	1.8 MAX	1.4	0.8
φ 4 × 15mm	DMJBRV34 Series	0.9~1.7	1.3	9500	75	0.9 MAX	1.4	0.75
	DMJBRV44 Series	1.5~2.5	2.0	9500	70	1.5 MAX	1.4	0.75
	DMJBRV54 Series	2.0~3.5	3.0	10000	70	2.0 MAX	1.4	0.8
φ 6 × 15mm	DMJBRV36 Series	0.9~1.7	1.3	9000	75	0.9 MAX	2.0	1.0
φ 6 × 17mm	DMJBRV86 Series	2.0~3.5	3.0	8000	70	2.0 MAX	2.5	1.4

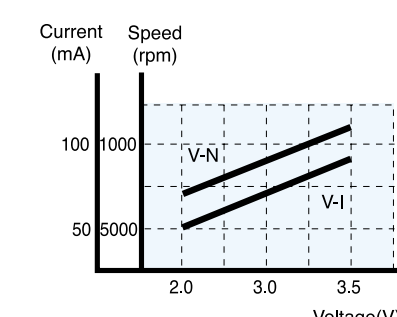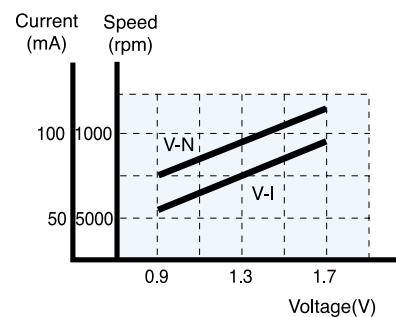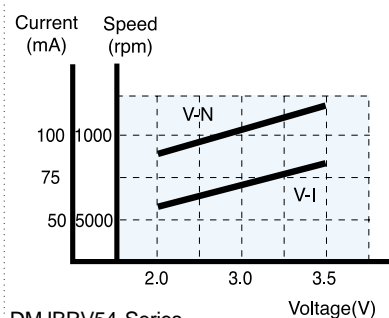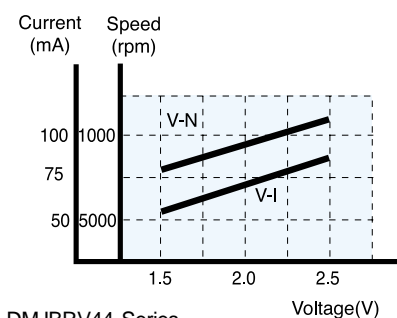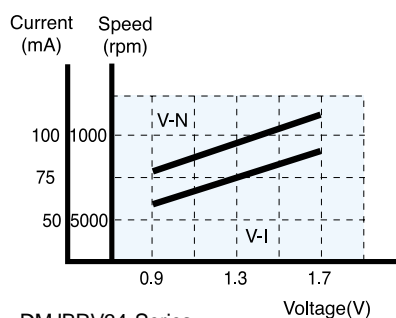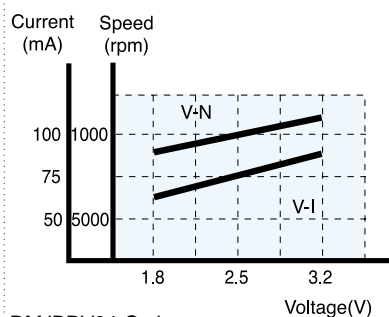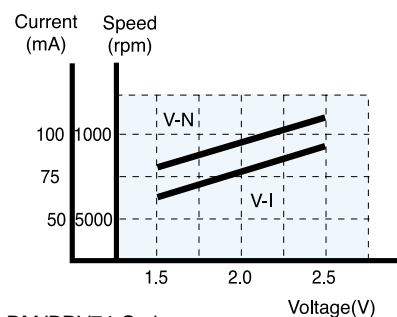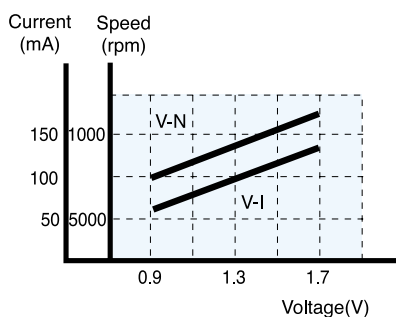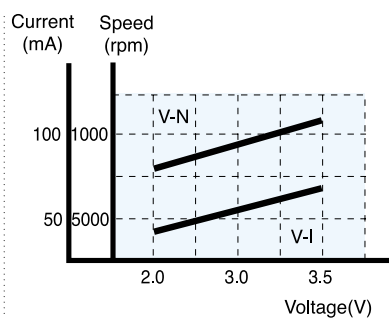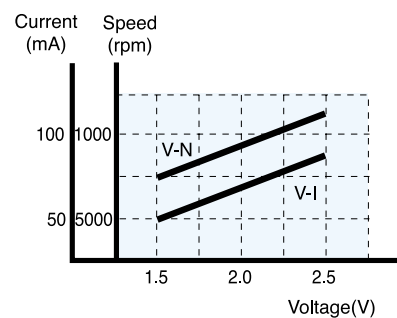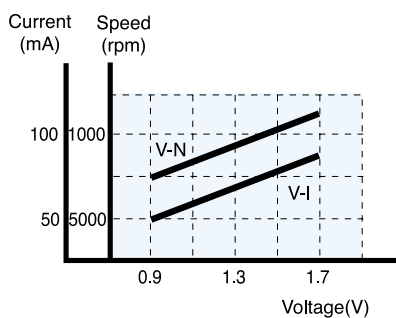

# VIBRATION MOTOR Coin type




## KEY FEATURES

- Permanent magnet coreless DC Motor
- Smooth rotation due to minimum cogging
- Low noise and low power consumption
- Operating voltage 1.3V, 2.0V, 3.0V
- Bracket, lead wire and connector are optional


## MODEL

- $\phi 12 \times 3.4\text{mm}$  Series
- $\phi 14 \times 3.4\text{mm}$  Series

## DIMENSIONS

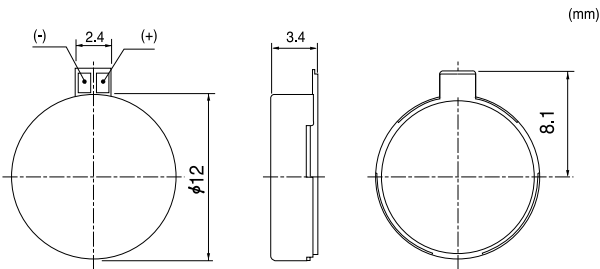


$\phi 12 \times 3.4\text{mm}$  Series

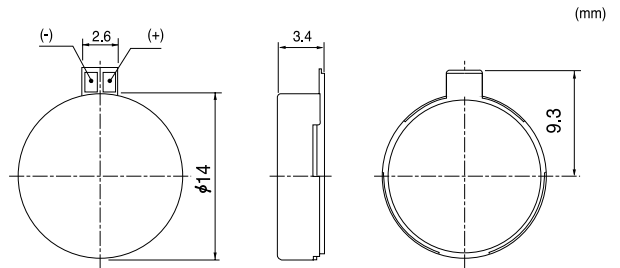


$\phi 14 \times 3.4\text{mm}$  Series

## SPECIFICATIONS

Series	Model	Working Voltage(V)	Rated Voltage(V)	Rated Load Speed(rpm)	Rated Load Current(mA)	Starting Voltage(V)	Weight (g)	Vibration (G/100g Jig)
$\phi 12 \times 3.4\text{mm}$	DMJBRV12 Series	2.6~3.6	3.0	11000	70	2.0 MAX	1.7	1.0
$\phi 14 \times 3.4\text{mm}$	DMJBRV14 Series	2.6~3.6	3.0	8500	35	2.0 MAX	2.2	1.4

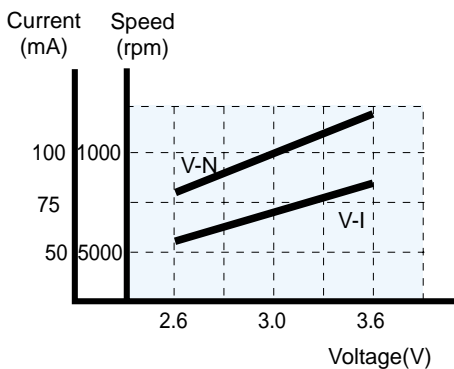

DMJBRV12 Series

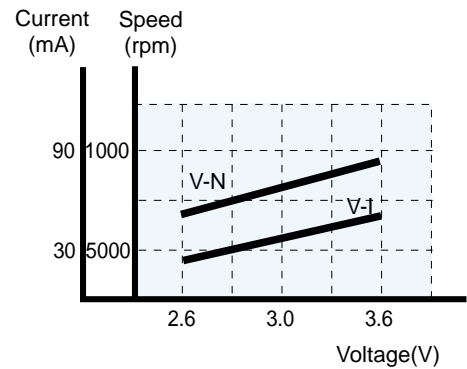

DMJBRV14 Series